

3001 Rack

Assembly Instructions



(*Rack shown with L-Rod substituting included straight rod on snare arm)

Parts List Please review your parts list to ensure you have all of the necessary components

- A.** 36" Curved bar w/4 multi clamps, 2 L rods, and 2 brace clamps
- B.** 34" Straight bar (leg upright) w/2 T clamps, 2 leg brace, & brace clamp
- C.** 34" Straight bar (leg upright) w/3 T clamps, 1 leg brace, and 2 brace clamps
- D. (X2)** 22" Rack foot assembly (1 T clamp, 2 rubber feet, & 1 leg brace)
- E.** 22" Straight extension bar w/2 multi purpose clamps (L rod clamps), 1 L rod, 1 leg brace
- F. (X2)** 14" Straight extension w/1 L rod clamp & 1 L rod

C- 34" Upright

A- 36" Curved bar

B- 34" Upright


F-14" Straight Extension

F- 14" Straight Extension

E- 22" Straight Extension

D- 22" Rack Foot Assembly

D- 22" Rack Foot Assembly

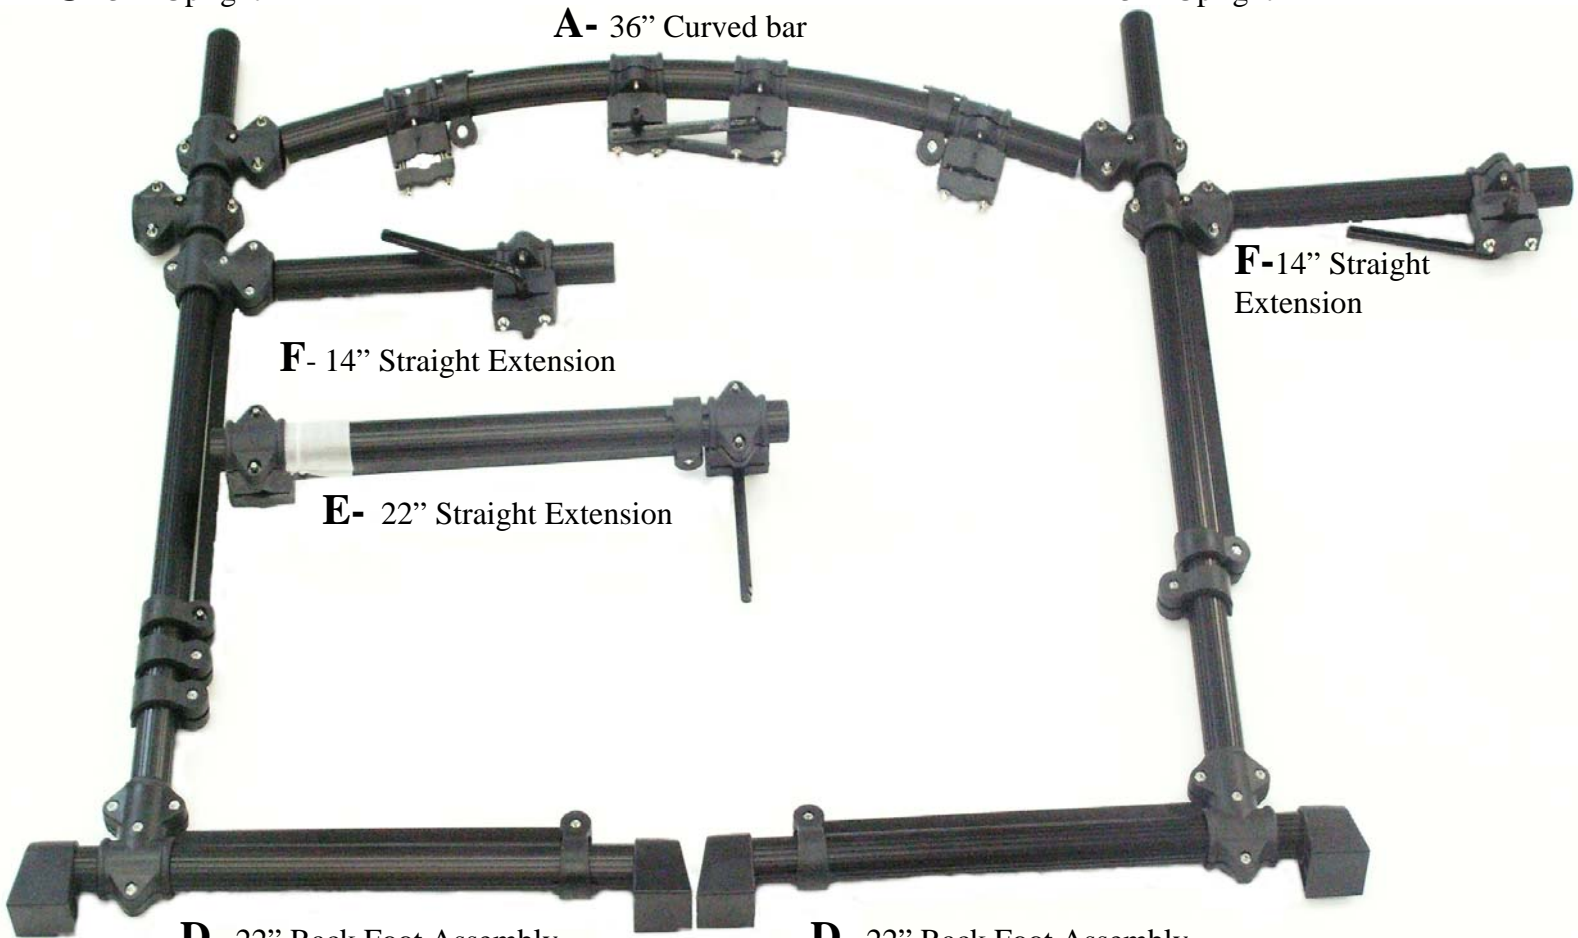

Step 1- “Building rack legs & feet”

- ***Locate the two component sets labeled “D”***
- ***Place foot assemblies on floor and rotate rubber feet until they are flush with the floor***



- ***Place 34” uprights (“C”) into T clamps on foot assemblies***



- ***Place the leg braces into the brace clamps as shown***



You’ve now completed your two upright assemblies.

Step 2- “Installing horizontal front bar and stabilizing ”

- ***Locate 36” curved bar “A”***



- ***Loosen T clamps at the top of completed upright assemblies. Insert the ends of curved bar into T clamps, and brace uprights as shown.***



Step 3- “Installing Extensions & finalizing Rack ”

- ***Locate components “E” and “F”***
- ***Loosen remaining T clamps on uprights***
- ***Insert rack extensions into their corresponding T – clamps, as shown***



Now that setup is complete, adjust the rack to your liking and check over all hex and drum key bolts to make sure they are all secure.



Thank you for choosing Pintech U.S.A.